



Typical Applications:

See selection guide on page 2 for recommended typical applications for TwinJet tips.


Features:

- Penetrates crop residue or dense foliage.
- Smaller droplets for thorough coverage.
- Better spray distribution along boom than with hollow cone nozzles.
- Available in stainless steel with VisiFlo® color-coding in 65°, 80° and 110° spray angles.
- Recommended pressure rating 30–60 PSI (2–4 bar).
- See page 32 for TwinJet even flat spray tips.
- Automatic spray alignment with 25598*-NYR Quick TeeJet® cap and gasket. Reference page 57 for more information.
- Reference technical section, pages 135–140 for additional information on drift.



Tip Model	Pressure (bar)	DROPSIZE		CAPACITY ONE NOZZLE IN l/min	l/ha 													
		80°	110°		4 km/h	5 km/h	6 km/h	7 km/h	8 km/h	10 km/h	12 km/h	16 km/h	18 km/h	20 km/h	25 km/h	30 km/h	35 km/h	
					Drop Size	Drop Size	Drop Size	Drop Size	Drop Size	Drop Size	Drop Size	Drop Size	Drop Size	Drop Size	Drop Size	Drop Size	Drop Size	Drop Size
TJ60-6501	2.0	VF		0.32	96.0	76.8	64.0	54.9	48.0	38.4	32.0	24.0	21.3	19.2	15.4	12.8	11.0	
TJ60-8001 (100)	2.5	VF		0.36	108	86.4	72.0	61.7	54.0	43.2	36.0	27.0	24.0	21.6	17.3	14.4	12.3	
	3.0	VF		0.39	117	93.6	78.0	66.9	58.5	46.8	39.0	29.3	26.0	23.4	18.7	15.6	13.4	
	3.5	VF		0.42	126	101	84.0	72.0	63.0	50.4	42.0	31.5	28.0	25.2	20.2	16.8	14.4	
	4.0	VF		0.45	135	108	90.0	77.1	67.5	54.0	45.0	33.8	30.0	27.0	21.6	18.0	15.4	
TJ60-650134 (100)	2.0			0.43	129	103	86.0	73.7	64.5	51.6	43.0	32.3	28.7	25.8	20.6	17.2	14.7	
	2.5			0.48	144	115	96.0	82.3	72.0	57.6	48.0	36.0	32.0	28.8	23.0	19.2	16.5	
	3.0			0.53	159	127	106	90.9	79.5	63.6	53.0	39.8	35.3	31.8	25.4	21.2	18.2	
	3.5			0.57	171	137	114	97.7	85.5	68.4	57.0	42.8	38.0	34.2	27.4	22.8	19.5	
	4.0			0.61	183	146	122	105	91.5	73.2	61.0	45.8	40.7	36.6	29.3	24.4	20.9	
TJ60-6502 TJ60-8002 TJ60-11002 (100)	2.0	F	F	0.65	195	156	130	111	97.5	78.0	65.0	48.8	43.3	39.0	31.2	26.0	22.3	
	2.5	F	VF	0.72	216	173	144	123	108	86.4	72.0	54.0	48.0	43.2	34.6	28.8	24.7	
	3.0	F	VF	0.79	237	190	158	135	119	94.8	79.0	59.3	52.7	47.4	37.9	31.6	27.1	
	3.5	F	VF	0.85	255	204	170	146	128	102	85.0	63.8	56.7	51.0	40.8	34.0	29.1	
	4.0	F	VF	0.91	273	218	182	156	137	109	91.0	68.3	60.7	54.6	43.7	36.4	31.2	
TJ60-6503 TJ60-8003 TJ60-11003 (100)	2.0	F	F	0.96	288	230	192	165	144	115	96.0	72.0	64.0	57.6	46.1	38.4	32.9	
	2.5	F	F	1.08	324	259	216	185	162	130	108	81.0	72.0	64.8	51.8	43.2	37.0	
	3.0	F	F	1.18	354	283	236	202	177	142	118	88.5	78.7	70.8	56.6	47.2	40.5	
	3.5	F	F	1.27	381	305	254	218	191	152	127	95.3	84.7	76.2	61.0	50.8	43.5	
	4.0	F	F	1.36	408	326	272	233	204	163	136	102	90.7	81.6	65.3	54.4	46.6	
TJ60-6504 TJ60-8004 TJ60-11004 (50)	2.0	M	F	1.29	387	310	258	221	194	155	129	96.8	86.0	77.4	61.9	51.6	44.2	
	2.5	M	F	1.44	432	346	288	247	216	173	144	108	96.0	86.4	69.1	57.6	49.4	
	3.0	F	F	1.58	474	379	316	271	237	190	158	119	105	94.8	75.8	63.2	54.2	
	3.5	F	F	1.71	513	410	342	293	257	205	171	128	114	103	82.1	68.4	58.6	
	4.0	F	F	1.82	546	437	364	312	273	218	182	137	121	109	87.4	72.8	62.4	
TJ60-8005 TJ60-11005 (50)	2.0	M	M	1.61	483	386	322	276	242	193	161	121	107	96.6	77.3	64.4	55.2	
	2.5	M	M	1.80	540	432	360	309	270	216	180	135	120	108	86.4	72.0	61.7	
	3.0	M	F	1.97	591	473	394	338	296	236	197	148	131	118	94.6	78.8	67.5	
	3.5	F	F	2.13	639	511	426	365	320	256	213	160	142	128	102	85.2	73.0	
	4.0	F	F	2.27	681	545	454	389	341	272	227	170	151	136	109	90.8	77.8	
TJ60-6506 TJ60-8006 TJ60-11006 (50)	2.0	M	M	1.94	582	466	388	333	291	233	194	146	129	116	93.1	77.6	66.5	
	2.5	M	M	2.16	648	518	432	370	324	259	216	162	144	130	104	86.4	74.1	
	3.0	M	M	2.37	711	569	474	406	356	284	237	178	158	142	114	94.8	81.3	
	3.5	M	F	2.56	768	614	512	439	384	307	256	192	171	154	123	102	87.8	
	4.0	M	F	2.74	822	658	548	470	411	329	274	206	183	164	132	110	93.9	
TJ60-6508 TJ60-8008 TJ60-11008 (50)	2.0	C	M	2.58	774	619	516	442	387	310	258	194	172	155	124	103	88.5	
	2.5	M	M	2.88	864	691	576	494	432	346	288	216	192	173	138	115	98.7	
	3.0	M	M	3.16	948	758	632	542	474	379	316	237	211	190	152	126	108	
	3.5	M	M	3.41	1023	818	682	585	512	409	341	256	227	205	164	136	117	
	4.0	M	M	3.65	1095	876	730	626	548	438	365	274	243	219	175	146	125	
TJ60-8010 TJ60-11010 (50)	2.0	C	M	3.23	969	775	646	554	485	388	323	242	215	194	155	129	111	
	2.5	C	M	3.61	1083	866	722	619	542	433	361	271	241	217	173	144	124	
	3.0	C	M	3.95	1185	948	790	677	593	474	395	296	263	237	190	158	135	
	3.5	M	M	4.27	1281	1025	854	732	641	512	427	320	285	256	205	171	146	
	4.0	M	M	4.56	1368	1094	912	782	684	547	452	342	304	274	219	182	156	

CONTACT PRODUCT	SYSTEMIC PRODUCT	DRIFT MANAGEMENT
EXCELLENT	—	—

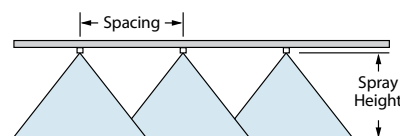

Optimum Spray Height

Spray Angle	Optimum Spray Height (cm)
65°	90 cm
80°	75 cm
110°	50 cm

How to order:

Specify tip number.

Example:

TJ60-8002VS – Stainless Steel with VisiFlo color-coding

Note: Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C). See pages 124–140 for drop size classification, useful formulas and other information.