



# TurfJet Wide Angle Flat Fan Spray Nozzles


## Typical Applications:

See selection guide on pages 2 and 6 for recommended typical applications for Wide Angle Flat Fan Spray Nozzles.

## Features:

- Can be used with Quick TeeJet® cap QJ4676-\* -NYR.
- Very large droplets.

- Direct replacement for plastic hollow-cone, low-drift nozzles.
- More precise flow and distribution pattern.
- Large orifice reduces clogging.
- Nozzle spacing — 20–40 inches (50–100 cm).
- Spraying pressure — 25–75 PSI (1.5–5 bar).

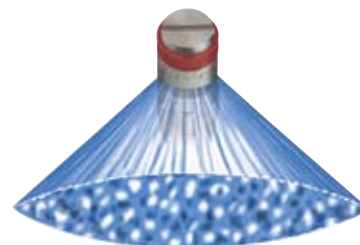

NOZZLE MODEL	bar	DROPSIZE	CAPACITY ONE NOZZLE IN /min	I/ha $\triangle$ 100cm $\triangle$												
				4 km/h	5 km/h	6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	12 km/h	16 km/h	20 km/h	25 km/h	30 km/h	35 km/h
1/4TTJ02 (50)	1.5	XC	0.56	84.0	67.2	56.0	48.0	42.0	37.3	33.6	28.0	21.0	16.8	13.4	11.2	9.6
	2.0	XC	0.65	97.5	78.0	65.0	55.7	48.8	43.3	39.0	32.5	24.4	19.5	15.6	13.0	11.1
	3.0	XC	0.79	119	94.8	79.0	67.7	59.3	52.7	47.4	39.5	29.6	23.7	19.0	15.8	13.5
	4.0	XC	0.91	137	109	91.0	78.0	68.3	60.7	54.6	45.5	34.1	27.3	21.8	18.2	15.6
	5.0	XC	1.02	153	122	102	87.4	76.5	68.0	61.2	51.0	38.3	30.6	24.5	20.4	17.5
1/4TTJ04 (50)	1.5	XC	1.12	168	134	112	96.0	84.0	74.7	67.2	56.0	42.0	33.6	26.9	22.4	19.2
	2.0	XC	1.29	194	155	129	111	96.8	86.0	77.4	64.5	48.4	38.7	31.0	25.8	22.1
	3.0	XC	1.58	237	190	158	135	119	105	94.8	79.0	59.3	47.4	37.9	31.6	27.1
	4.0	XC	1.82	273	218	182	156	137	121	109	91.0	68.3	54.6	43.7	36.4	31.2
	5.0	XC	2.04	306	245	204	175	153	136	122	102	76.5	61.2	49.0	40.8	35.0
1/4TTJ05 (50)	1.5	XC	1.39	209	167	139	119	104	92.7	83.4	69.5	52.1	41.7	33.4	27.8	23.8
	2.0	XC	1.61	242	193	161	138	121	107	96.6	80.5	60.4	48.3	38.6	32.2	27.6
	3.0	XC	1.97	296	236	197	169	148	131	118	98.5	73.9	59.1	47.3	39.4	33.8
	4.0	XC	2.27	341	272	227	195	170	151	136	114	85.1	68.1	54.5	45.4	38.9
	5.0	XC	2.54	381	305	254	218	191	169	152	127	95.3	76.2	61.0	50.8	43.5
1/4TTJ06 (50)	1.5	XC	1.68	252	202	168	144	126	112	101	84.0	63.0	50.4	40.3	33.6	28.8
	2.0	XC	1.94	291	233	194	166	146	129	116	97.0	72.8	58.2	46.6	38.8	33.3
	3.0	XC	2.37	356	284	237	203	178	158	142	119	88.9	71.1	56.9	47.4	40.6
	4.0	XC	2.74	411	329	274	235	206	183	164	137	103	82.2	65.8	54.8	47.0
	5.0	XC	3.06	459	367	306	262	230	204	184	153	115	91.8	73.4	61.2	52.5
1/4TTJ08	1.5	XC	2.23	335	268	223	191	167	149	134	112	83.6	66.9	53.5	44.6	38.2
	2.0	XC	2.58	387	310	258	221	194	172	155	129	96.8	77.4	61.9	51.6	44.2
	3.0	XC	3.16	474	379	316	271	237	211	190	158	119	94.8	75.8	63.2	54.2
	4.0	XC	3.65	548	438	365	313	274	243	219	183	137	110	87.6	73.0	62.6
	5.0	XC	4.08	612	490	408	350	306	272	245	204	153	122	97.9	81.6	69.9
1/4TTJ10	1.5	XC	2.79	419	335	279	239	209	186	167	140	105	83.7	67.0	55.8	47.8
	2.0	XC	3.23	485	388	323	277	242	215	194	162	121	96.9	77.5	64.6	55.4
	3.0	XC	3.95	593	474	395	339	296	263	237	198	148	119	94.8	79.0	67.7
	4.0	XC	4.56	684	547	456	391	342	304	274	228	171	137	109	91.2	78.2
	5.0	XC	5.10	765	612	510	437	383	340	306	255	191	153	122	102	87.4
1/4TTJ15	1.5	XC	4.19	629	503	419	359	314	279	251	210	157	126	101	83.8	71.8
	2.0	XC	4.83	725	580	483	414	362	322	290	242	181	145	116	96.6	82.8
	3.0	XC	5.92	888	710	592	507	444	395	355	296	222	178	142	118	101
	4.0	XC	6.84	1026	821	684	586	513	456	410	342	257	205	164	137	117
	5.0	XC	7.64	1146	917	764	655	573	509	458	382	287	229	183	153	131

Note: Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C).




## QJ4676-90-1/4-NYR

- 90° fitting attaches to Quick TeeJet bodies—1/4" female threaded outlet.
- Simple installation of TurfJet nozzles on vertical nozzle bodies.
- Nylon construction.



CONTACT PRODUCT	SYSTEMIC PRODUCT	DRIFT MANAGEMENT
—	EXCELLENT	EXCELLENT



## Optimum Spray Height

50 cm	60 cm*
75 cm	75 cm*
100 cm	100 cm*

\*Wide angle spray nozzle height is influenced by nozzle orientation. The critical factor is to achieve a minimum 30% overlap.

See pages 173–187 for drop size classification, useful formulas and information.

## How to order:

Specify tip number.

Examples:

1/4TTJ04-VS – Stainless Steel with VisiFlo® color-coding

1/4TTJ06-VP – Polymer with VisiFlo color-coding