



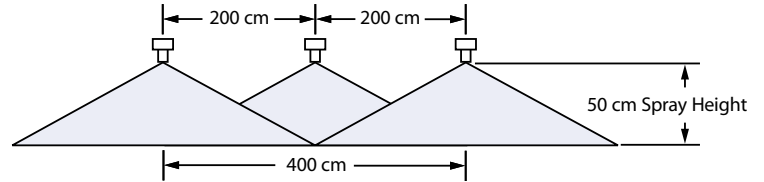

TFW Turbo FloodJet® Extra-Wide Angle Flat Spray Tips

Features:

- Excellent spray distribution quality.
- Extra-wide spray pattern allows tip to be used for boomless spray applications.
- Ideal tip for residential and estate sprayers.
- Single tip provides approximately 160" (400 cm) spray pattern width at 20" (50 cm) height.
- For proper coverage spray patterns must be double overlapped.
- Large orifice reduces likelihood of clogging.
- Recommended operating pressure range: 20–50 PSI (1.5–3.5 bar).
- All brass construction.
- Can be used with CP25599-*/-NY Quick TeeJet® cap for automatic alignment.

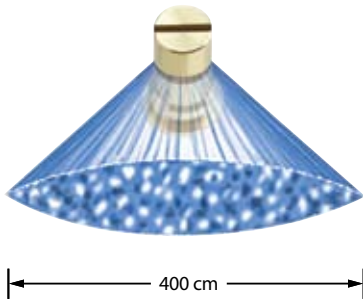

Spray height may require adjustment to provide a suggested double overlap condition. As shown above.



How to order:
Specify tip number.
Examples:
TFW-12 – Brass
TFW-20 – Brass

Nozzle Icon	Pressure (bar)	CAPACITY ONE NOZZLE IN l/min	l/ha 200cm											
			4 km/h	5 km/h	6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	12 km/h	16 km/h	20 km/h	25 km/h	30 km/h
TFW-12	1.5	3.35	251	201	168	144	126	112	101	83.8	62.8	50.3	40.2	33.5
	2.0	3.87	290	232	194	166	145	129	116	96.8	72.6	58.1	46.4	38.7
	2.5	4.33	325	260	216	185	162	144	130	108	81.1	64.9	51.9	43.3
	3.0	4.74	356	284	237	203	178	158	142	119	88.9	71.1	56.9	47.4
	3.5	5.12	384	307	256	219	192	171	154	128	96.0	76.8	61.4	51.2
TFW-20	1.5	5.58	418	335	279	239	209	186	167	139	105	83.7	66.9	55.8
	2.0	6.44	483	387	322	276	242	215	193	161	121	96.6	77.3	64.4
	2.5	7.20	540	432	360	309	270	240	216	180	135	108	86.4	72.0
	3.0	7.89	592	473	395	338	296	263	237	197	148	118	94.7	78.9
	3.5	8.52	639	511	426	365	320	284	256	213	160	128	102	85.2

Note: Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C). See pages 173–187 for useful formulas and information.