

# MeterJet® Spray Guns



Model 23623-31

The MeterJet spray gun is designed to deliver a precisely metered volume of spray solution for low pressure spot applications of agricultural chemicals. The adjustable metering assembly allows the applicator to discharge precise volumes from 1 to 16 milliliters with a single pull of the trigger. Release of the trigger automatically recharges the unit for the next dosage. The MeterJet spray gun will accept all TeeJet® spray tips for many types of applications.

### Features:

- Available with AA31 GunJet spray guns.
- Adjustable scales to accurately set volumes to nearest 0.1 ml.

- Charge indicator provides positive verification of full pressure in chamber.
- Maximum operating pressure of 75 PSI (5 bar).
- Minimum pressure of 25 PSI (1.7 bar) to charge unit.
- Optional spring for low volume applications available.
- Inlet connections available in ¼" NPT or BSPT (F).
- Wetted parts: Nylon, Teflon®, brass and stainless steel.

### How to order:

Specify part number.  
Example: (B)23623-31  
(B) = BSPT THREADS

# TeeJet® Lawn Spray Guns



Model 25660


### Features:

- Interchangeable nozzle tips are color-coded for easy identification of nozzle tip size.
- Nozzle tips provide a 45° full cone "showerhead" spray pattern.
- Convenient trigger lock for continuous spraying.

- Options available: hose shank swivel for inlet connection and extension wand and adapters for low-volume and spot spraying.
- Maximum operating pressure of 200 PSI (14 bar).
- Made of Nylon with Viton® O-rings and stainless steel springs.

MODEL NUMBER	NOZZLE TIP NUMBER	CAPACITY (l/min) AT VARIOUS PRESSURE*						
		0.15 bar	0.3 bar	0.4 bar	0.6 bar	0.7 bar	1 bar	1.5 bar
25660-1.5	25670-1.5-NY	5.4	7.5	8.4	10.2	10.9	12.8	15.7
25660-3.0	25670-3.0-NY	7.8	10.6	11.9	14.4	15.5	18.2	22.0
25660-4.0	25670-4.0-NY	9.1	12.4	13.9	17.0	17.8	20.9	25.4

\*Pressure measured at spray nozzle.

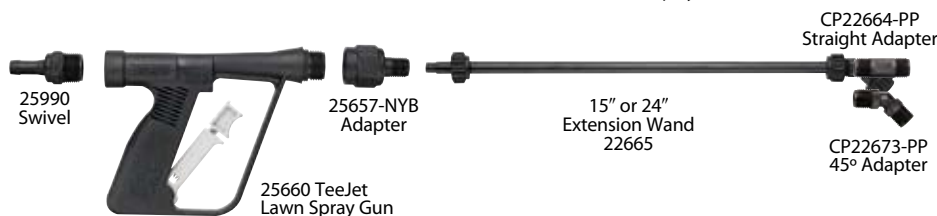

### 25990 Swivel

Allows operator to concentrate on application without hose interference. ¾" (M) NPT connection with ½" hose shank. Maximum pressure 150 PSI (10 bar).

### 25657-NYB Adapter

Replaces shower nozzle to allow extension wand or standard TeeJet tip to be attached directly to lawn spray gun. ¾" (F) GHT inlet with ¼"-16 TeeJet thread outlet. Maximum pressure 150 PSI (10 bar). See page 115 for adjustable ConeJet® nozzles.

### 22665 Extension Wand

For low volume and spot spraying applications. Available in both 15" and 24" (38 cm and 61 cm) lengths, the extension fits on 25657-NYB adapter. Maximum pressure 150 PSI (10 bar).

### CP22673-PP & CP22664-PP Adapters

Used for attaching standard TeeJet tips or adjustable ConeJet nozzles. See page 115 for adjustable ConeJet nozzles.

